



# VPM-H HYDRAULICALLY DRIVEN VPM


The power of the hydraulically driven VPM. Meticulously designed and engineering by Walter Meano Engineering, this submersible pump is ideal for mining, agriculture, road works, civil engineering, forestry and many more applications. It boasts high-efficiency with low cost and low maintenance.

## SPECIFICATIONS

- Dimensions (mm) LxWxH = 250 x 230 x 335
- Mass 23kg
- Max Static Head 50m
- Max Output Delivery 1200 lpm
- Discharge Pipe Tap 50mm
- Hydraulic Inlet Tap 12mm (1/2") BSPP
- Hydraulic Return Pipe Tap 12mm (1/2") BSPP
- Operating Pressure Range 90 – 140 bar
- Optimum Operating Pressure 110 bar
- Input Hydraulic Flow Range 26 – 32 lpm
- Material: Standard Hydraulic Motor – Aluminium Wet-End – Spheroidal Graphite Cast Iron
- Material: Flameproof Cast Iron Casing Throughout



## HYDRAULICALLY DRIVEN VPM

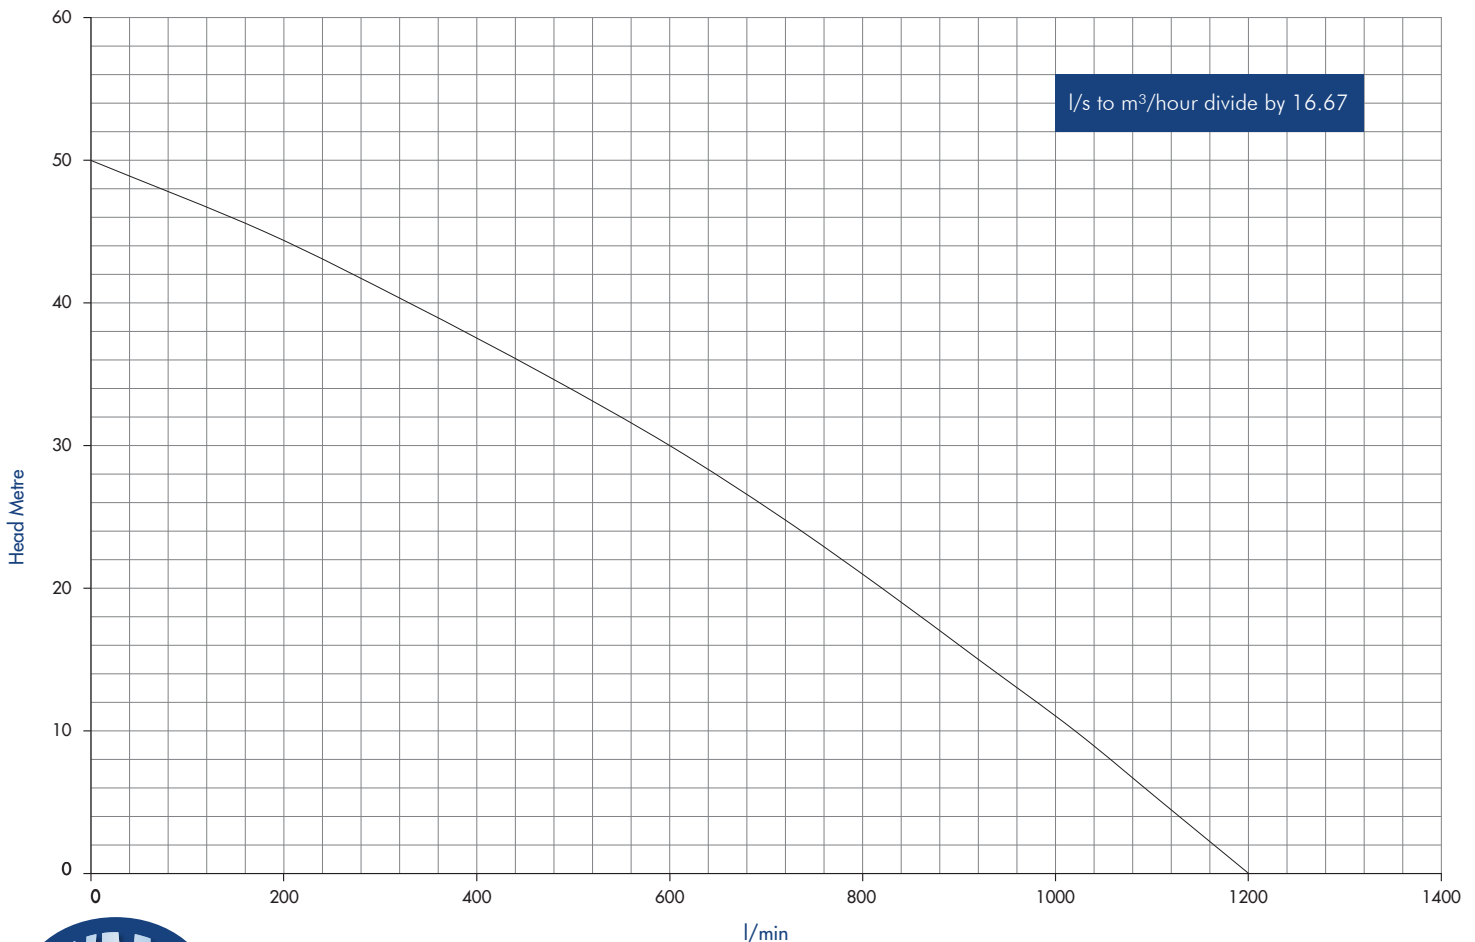

Versaflo Pumps are manufactured by Walter Meano Engineering (Pty) Ltd.

Walter Meano Engineering (WME), established in 1967 has ISO 9001- 2008 accreditation. WME Manufactures the VersaFlo range of Pumps and is a supplier to the OEM'S of the Mining, Motor and Defence Industry.